

# INTERTECH PUMPS

Engineering That Ignites

## 4517MP

### AVAILABLE MOUNTING CONFIGURATIONS

4517MP-F FRAME MOUNT  
 4517MP-EM ENGINE MOUNT  
 4517MP-RP-F REDI-PRIME FRAME MOUNT  
 4517MP-RP-EM REDI-PRIME ENGINE MOUNT

### OPERATING LEVELS

<b>MIN FLOW</b>	375 GPM	85 m <sup>3</sup> /h
<b>MAX FLOW</b>	1750 GPM	397 m <sup>3</sup> /h
<b>DISCHARGE SIZE</b>	4"	100 mm
<b>SUCTION SIZE</b>	5"	125 mm
<b>SOLIDS HANDLING</b>	3"	76 mm
<b>MAX SPEED</b>	2000 RPM	2000 RPM
<b>SHUT-OFF HEAD</b>	480'	146 m
<b>BEP HEAD</b>	390'	119 m
<b>BEP FLOW</b>	1525 GPM	346 m <sup>3</sup> /h
<b>BEP</b>	68%	68%



A typical picture of the pump is shown. Please contact InterTech Pump Company for further details. All information is approximate and for general guidance only.

PARTS	HYBRID	HIGH CHROME
<b>IMPELLER</b>	CHROME IRON	CHROME IRON
<b>VOLUTE</b>	DUCTILE IRON	CHROME IRON
<b>SHAFT</b>	17-4 P.H. STAINLESS STEEL	17-4 P.H. STAINLESS STEEL
<b>SHAFT SLEEVE</b>	416 STAINLESS STEEL CHR. PLATED	416 STAINLESS STEEL CHR. PLATED
<b>SUCTION COVER</b>	DUCTILE IRON	DUCTILE IRON
<b>BACKPLATE</b>	DUCTILE IRON	CHROME IRON
<b>WEAR PLATE</b>	CHROME IRON	CHROME IRON
<b>MECHANICAL SEAL</b>	TUNGSTEN CARBIDE VS. SILICON CARBIDE	TUNGSTEN CARBIDE VS. SILICON CARBIDE
<b>BEARING FRAME</b>	CAST IRON	CAST IRON
<b>O-RINGS</b>	VITON	VITON

The 4517MP pump is designed with InterTech's renowned quality and durability. It features a 4" discharge, 5" suction, and enclosed impeller. Available in Hybrid or High Chrome materials. InterTech's patented Cycloseal® design is standard, with a Type 2 single mechanical seal with Viton elastomers, stainless steel hardware and tungsten carbide vs. silicon carbide seal faces for abrasion resistance. Heavy-duty F18 bearing frame with double angular contact thrust bearing on frame-mount models.

- Flow rates up to 2,000 GPM / Heads up to 470'
- Redi-Prime® available for fully-automatic continuous priming
- RunDry™ option (Indefinite run dry capability)
- Hardness rating > 600BHN provides better wear
- Heavy-duty construction
- Front adjustable wear plate
- Replaceable wear plates



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL & GAS



REFRIGERATION




RENTAL

# INTERTECH PUMPS

Engineering That Ignites



Performances shown are for S.G. 1.0 60°F water, frame mounted configuration with cydoseal. Other mounting styles or S.G. may require curve adjustments.	Speed	Impeller Dia.	Style	Volute	Solids Dia.	N <sub>s</sub>	Suction	Discharge	No. Vanes
	VARIOUS	17.50"	ENCLOSED	SINGLE	3.00"	980	5"	4"	2

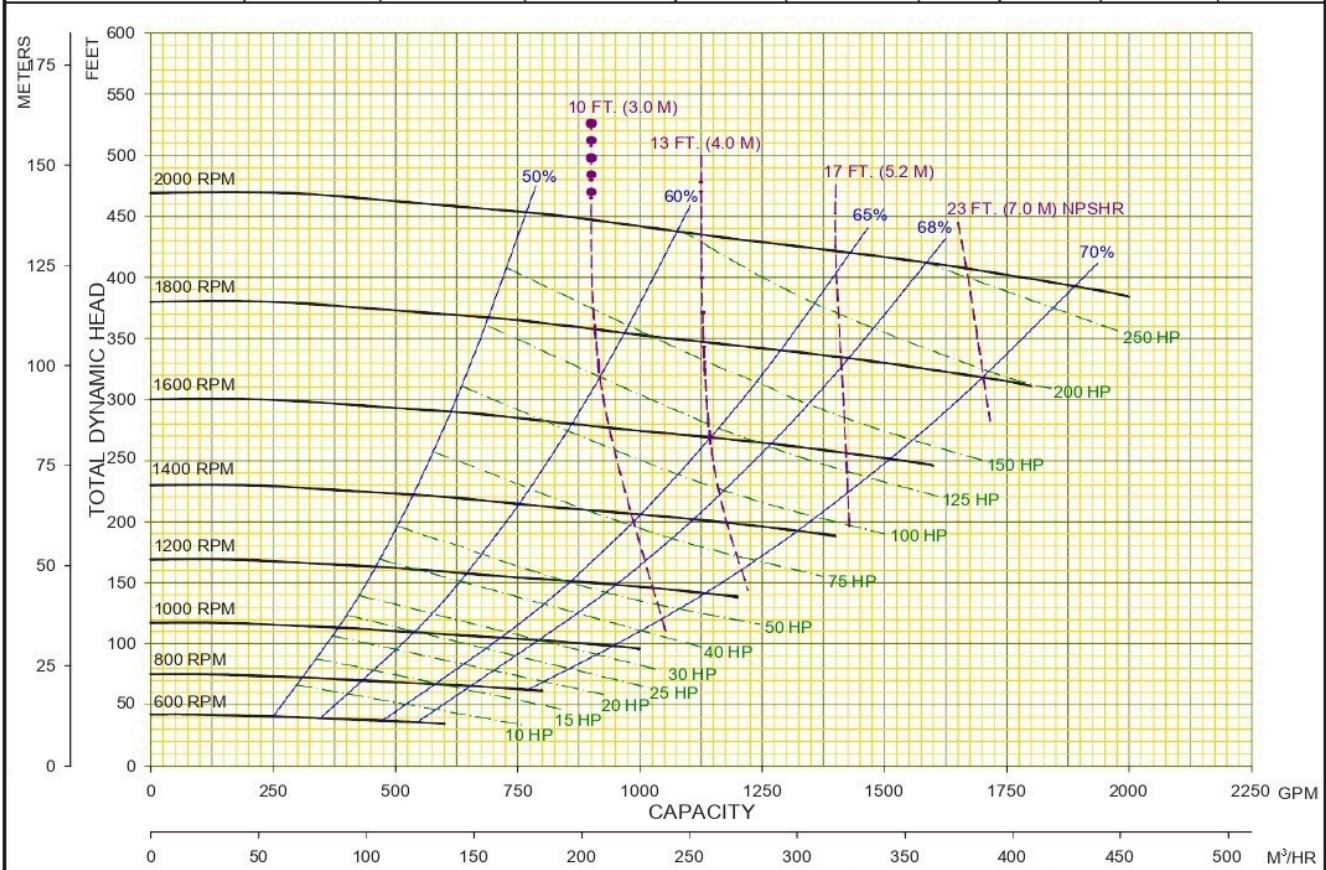

InterTech Pump Company	01	02/10/15	CTG	MODEL : 4517MP	CURVE NO.
	00	06/21/13		TYPE :SOLIDS HANDLING	4517MPVA